

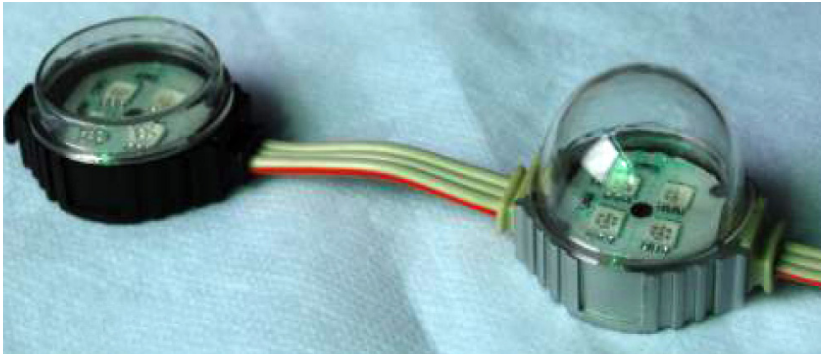


Z-Cluster 1 | 4

CLUSTERS

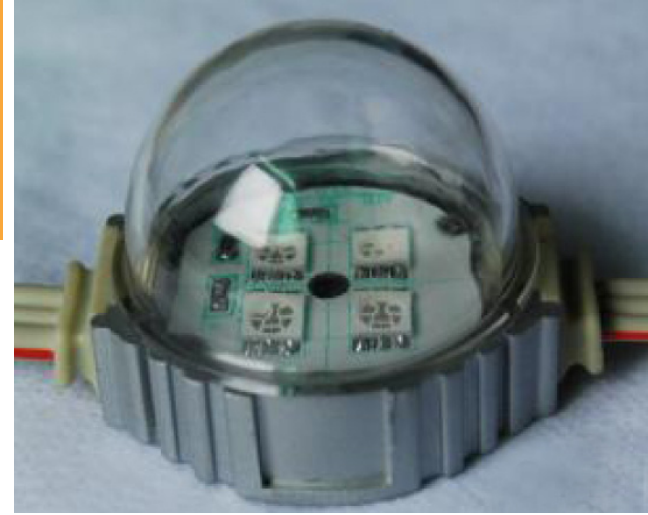

The Z-Cluster flexible lighting modules provide a wide variety of options for stringing lights in outdoor and indoor applications. This product comes in configurations of 1-led and 4-led modules. Each Z-Cluster is controllable so making animation or messaging is a breeze.



Soar to new heights of creativity with the Z-Cluster flexible lighting modules.



Specification	Z-Cluster 1	Z-Cluster 4
Operating voltage	DC5V	DC15V
Power consumption (max/avg)	0.3W / 0.15W	1.2W / 0.8W
LED Qty	RGB Color 5050SMD	4PCS 5050SMD
Light intensity (mcd) – RGB	1,950	9,800
Light intensity (mcd) – W	5,000	23,000
Light intensity (mcd) – Y	1,000	5,000
Light intensity (mcd) – B	850	4,400
Power supply type	switching power supply	switching power supply
Power supply input	AC 90 ~ 264V, 47 ~ 63HZ	AC 90 ~ 264V, 47 ~ 63HZ
Power supply output	DC5V	DC15V
Power (max/avg)	600W / 350W	600W / 350W
Protection Level	IP66	IP66
Operating Temp (C)	-20° ~ 50°	-20° ~ 50°
Weight	8±1g	25g

