

Z-Flex Breeze

FLEXIBLE



The Z-Flex Breeze boasts a number of features that make it an excellent choice for touring. As a weather-resistant, blow-through panel, it is ideal for outdoor applications. Its flexibility allows for maximum creativity in stage design. It comes in multiple resolutions, is known for reliability, and can be both rapidly deployed and easily packed up when it's time to hit the road.




With its excellent
blow-through feature,
this panel makes flexible
lighting a breeze.



PIXZEL
EFFECTS

Z-Flex Breeze Technical Specifications

Specification	Z-Flex Breeze 18	Z-Flex Breeze 25	Z-Flex Breeze 37	Z-Flex Breeze 75
Pitch	18mm	25mm	35mm	75mm
Brightness (Nit or cd/m ²)(Max.)	3,500	2,800	2,000	800
Resolution H x V	16 x 64	12 x 48	8 x 32	4 x 16
Pixels / Module	1,024	576	256	64
Pixels / m ²	2,844	1,600	711	177
Module Size (cm) V x H x D	120 x 29.2 x 1.05	120 x 29.2 x 1.05	120 x 30 x 1.15	120 x 29.2 x 1.34
Module Size (ft) V x H x D	3.94 x 0.96 x 0.03	3.94 x 0.96 x 0.03	3.94 x 0.98 x 0.04	3.94 x 0.96 x 0.04
Module Area (m ²)	0.36	0.36	0.36	0.36
Refresh rate (Hz)	>2,000 <4,000	>2,000 <4,000	>2,000 <4,000	>2,000 <4,000
View Angle H x V	120 x 120	120 x 120	120 x 120	120 x 120
Power / m ² (W) (max/avg)	500 / 180	320 / 115	194 / 70	56 / 20
LED type	3-in-1 SMD	3-in-1 SMD	3-in-1 SMD	3-in-1 SMD
Protection Level (front/rear)	IP65/IP65	IP65/IP65	IP65/IP65	IP65/IP65
Operating Temp (C)	-20 – 50°	-20 – 50°	-20 – 50°	-20 – 50°
Weight	3.55kg/7.83lbs	2.9kg/6.39lbs	2.92kg/6.44lbs	1.35kg/2.98lbs
Weight m ²	9.87kg/21.75lbs	8.06kg/17.75lbs	8.11kg/17.88lbs	3.75kg/8.27lbs
Certificates	TUV/CE/ROHS	TUV/CE/ROHS	TUV/CE/ROHS	TUV/CE/ROHS
Transparency	40%	50%	57%	75%

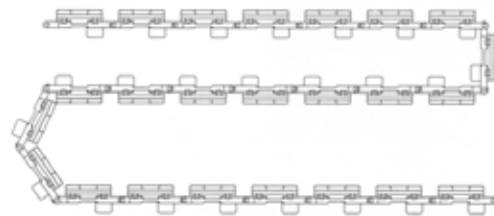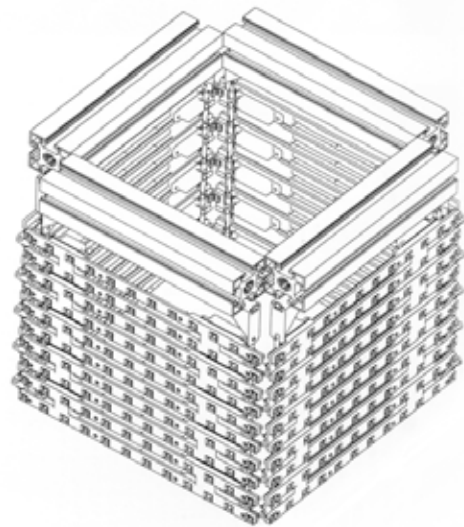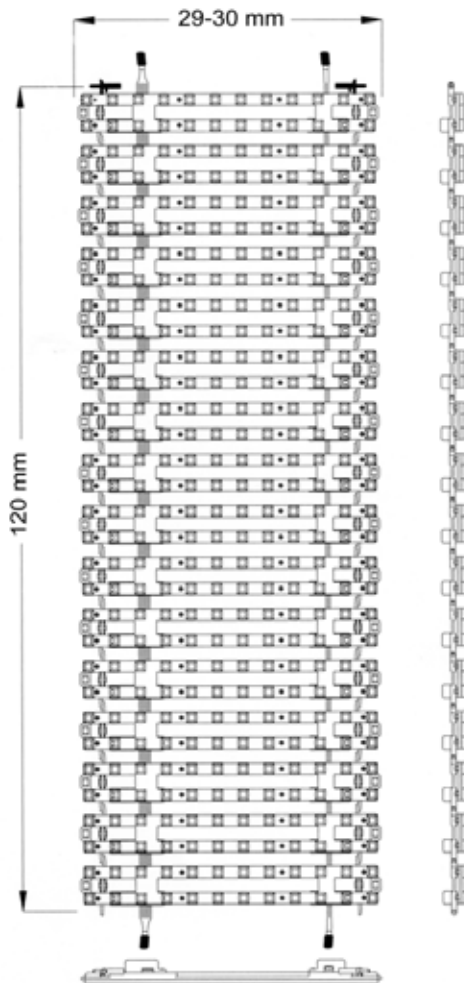

Tall arrays can quickly fold directly into road cases.