


Z-Flex Curve

FLEXIBLE



The Z-Flex Curve is ideal for complex curves, especially in permanent installations, such as marquees and sports arenas. The panel features curves as small as 1.5mm diameter. Also featuring lightweight and blow-through attributes, this flexible panel is definitely ahead of the curve.

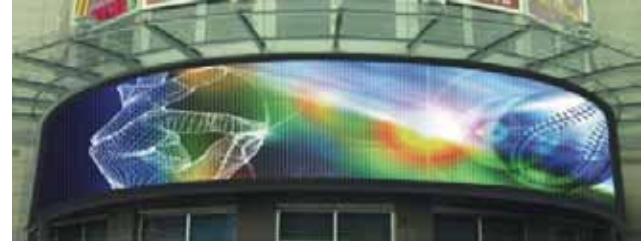

The Z-Tile offers curvaceous solutions for indoor and outdoor applications.



Z-Flex Curve Technical Specifications

Specification	Z-Flex Curve 15	Z-Flex Curve 20
Pitch	15.625 mm	20 mm
Brightness (Nit or cd/m ²)(Max.)	4,500	3,000
Resolution H x V	32 x 32	
Pixels / Module	1,024	
Pixels / m ²	4,096	2,500
Module Size (mm) V x H x D	500 x 500 x 123	640 x 640 x 123
Module Size (in) V x H x D	19.7" x 19.7" x 4.8"	25.2" x 25.2" x 4.8"
Module Area (m ²)	0.25	0.41
Refresh rate (Hz)	800	800
View Angle H x V	120 x 120	120 x 120
Power / m ² (W) (max/avg)	600 /	450 /
LED type	3-in-1 SMD	3-in-1 SMD
Protection Level (front/rear)	IP65/IP65	IP65/IP65
Operating Temp (C)	-20° – 50°	-20° – 50°
Operating Humidity	20% – 85%	20% – 85%
Weight	24.24 lbs / 11 kg	24.24 lbs / 11 kg
Weight m ²	44 lbs / 97 kg	44 lbs / 97 kg

