


Z-Grid Brick

RIGID



The Z-Grid Brick is a multi-purpose LED display, suitable for the most demanding touring applications (indoor and outdoor) with its tour-tested, robust aluminum frame. High quality SMD technology provides a fantastic video display. Setup and take down is easy, and the unique aluminum frame design permits 90° outside corners, offering unlimited creative possibilities.

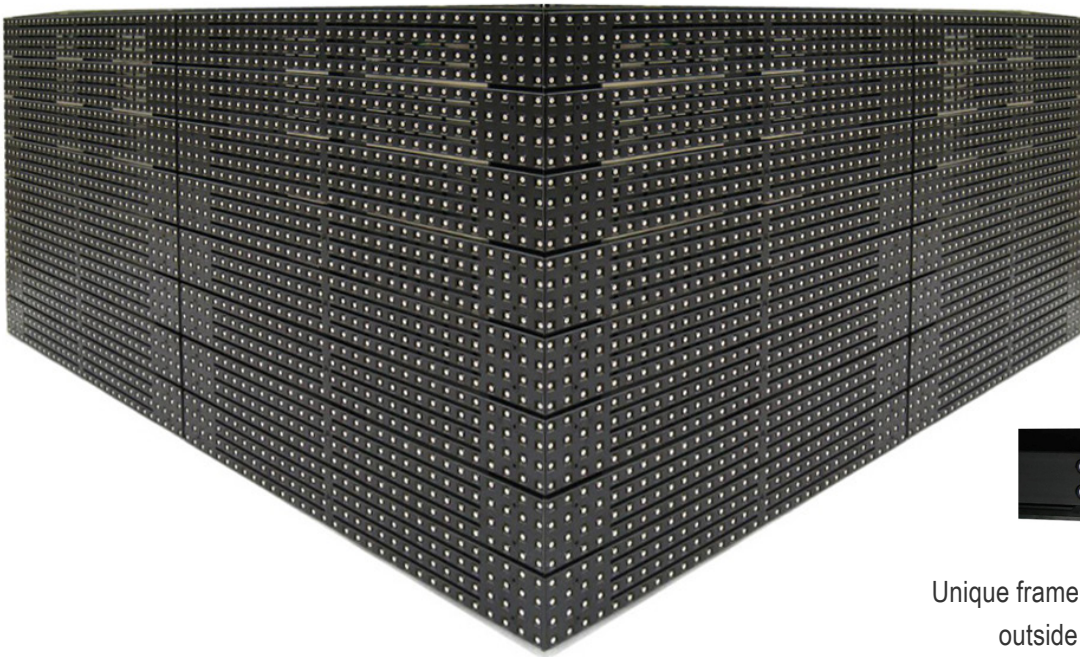

Unique frame design allows for true 90° outside corners (top view shown).

Extreme brightness, rugged aluminum frame and tight pitch combine to make this panel the professional's choice.



Specification	Z-Grid Brick
Pitch	15.625 mm
Brightness (Nit or cd/m ²)(Max.)	5,500
Resolution H x V	64 x 32
Pixels / Module	2,048
Pixels / m ²	4,096
Module Size (mm) V x H x D	500 x 1,000 x 112
Module Size (in) V x H x D	19.7 x 39.4 x 4.4
Module Area (m ²)	0.5
Refresh rate (Hz)	1,000
View Angle H x V	120 x 90
Power / m ² (W) (max/average)	830 / 280
LED type	3-in-1 SMD
Protection Level (front/rear)	IP65/IP43
Operating Temp (C)	-20° – 50°
Operating Humidity	10% – 90%
Weight	33 lbs / 15 kg
Weight m ²	66 lbs / 30 kg
Transparency	40%
Driver Mode	static, constant current